

The GVS Group is one of the world's leading manufacturers of filter solutions for applications in the Healthcare & Life Sciences, Energy & Mobility and Health & Safety sectors. GVS technology promotes health and safety in highly regulated environments. Throughout its 40-year history, GVS has evolved from a supplier of components for the healthcare sector to a global Group that provides a range of diversified, high-tech filtration solutions.




# NEW ABLUO SUPREME SYRINGE FILTER

## Step up your sample preparation with GVS ABLUO SUPREME Syringe Filters

GVS offers a range of disposable syringe filter devices designed to provide fast and efficient filtration of aqueous and organic solutions with high particulate content.




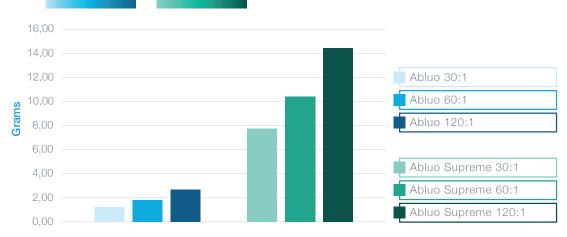

### What's Special:

- Supreme Purification: Easily separate sediment and grit from samples, ensuring quality, and leaving you with the purest sample for your application.
- Supreme Flexibility: A full portfolio of products with various pore sizes, sterility options, and membranes available (including Hydrophilic PTFE)!
- Supreme Strength: Our most durable and robust syringe filter, the ABLUO SUPREME allows for the filtration of the heaviest sediment, resulting in a pure sample every time.
- Save Money: Use 1 ABLUO SUPREME in the place of 3 (or more) normal syringe filters!
- Save Operator Time and Effort: Two layers of pre-filter allow for the use of less force, making filtration faster and easier for lab techs!
- Save Sleep: Rest easy knowing that the ABLUO SUPREME Syringe Filter is made to conform to ISO standards.
- Save the environment: By using the ABLUO SUPREME, you are able to do the work of 5 and more normal syringe filters. Additionally, some ABLUO SUPREME models are compatible with an autoclave, meaning less plastic waste.

# **Technical Specifications**




Membrane Diameter: 25 mm Effective Filtration Area: 4.63 cm² Housing Diameter: 30 mm

Housing Materials: Clear Polypropylene


**Maximum Operating Temperature:** 90°C / 194°F

**Maximum Operating Pressure:** 75 psi **Shelf Life (normal conditions):** 3 years

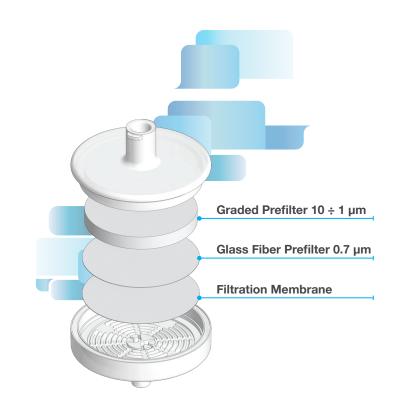

### **Ordering information**

Membrane	Pore Size (µm)	Description	Product Code
NY	0.2	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - NY 0.2 μm	GF25BNPGN002AD01
NY	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - NY 0.45 μm	GF25BNPGN004AD01
PES	0.2	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PES 0.2 μm	GF25BNPGS002AD01
PES	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PES 0.45 μm	GF25BNPGS004AD01
PTFE	0.2	ABLUO SUPREME Syringe Filter 2 5mm, FLL/MLS - PTFE 0.2 μm	GF25BNPGT002AD01
PTFE	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PTFE 0.45 μm	GF25BNPGT004AD01
PTFE (Hydrophilic)	0.2	ABLUO SUPREME Syringe Filter 2 5mm, FLL/MLS - PTFE Hydrophilic 0.2 μm	GF25BNPGH002AD01
PTFE (Hydrophilic)	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PTFE Hydrophilic 0.45 µm	GF25BNPGH004AD01
PVDF	0.2	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PVDF 0.2 μm	GF25BNPGV002AD01
PVDF	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PVDF 0.45 μm	GF25BNPGV004AD01
CA	0.2	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - CA 0.2 μm	GF25BNPGA002AD01
CA	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - CA 0.45 μm	GF25BNPGA004AD01

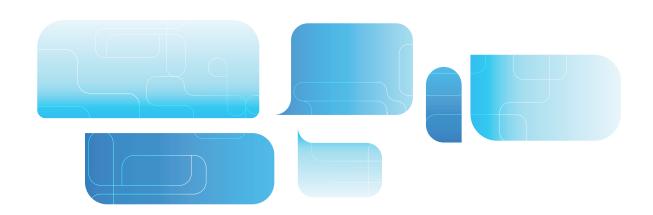



# **Applications**



NY Properties

Hydrophilic - Low protein binding -Superior strength - Resistant to organic solvents

## **Compounds Class**

Bases, HPLC solvents, alcohols, aromatic hydrocarbons



PES

Properties
Hydrophilic - Designed to ren

Hydrophilic - Designed to remove particulates - Low protein and drug binding - High strength and durability

### **Compounds Class**

Filtration of buffers and culture media



PTFE

**Properties** 

Hydrophobic - Chemically and biologically inert - Superior chemical resistance

## **Compounds Class**

Organic solvents, acids, alcohols, bases, aromatics



PTFE (Hydrophilic)

**Properties** 

Hydrophilic - High chemical resistance - Low protein binding

### **Compounds Class**

Aqueous and organic solutions



**PVDF** 

**Properties** 

Hydrophilic - Very low protein binding - High flow rates

## **Compounds Class**

Alcohols, biomolecules



CA

**Properties** 

Hydrophilic - Low non-specific binding - Low adsorption - Uniform pore structure

## **Compounds Class**

Protein/Enzymes, protein recovery, tissue culture media filtration, wine filtration, pre-filtration of plasma fractions and vaccines

# How to use - Operating Instructions

- 1. Remove a syringe filter from its box or container. If using a sterile filter please check that the individual package has not been damaged. Peel the protective lid and hold the filter in one hand without removing it from the blister.
- 2. Prepare the sample to be filtered and place it in a syringe. If using a syringe smaller than 10 ml, please proceed with caution as these syringes can generate an injection pressure exceeding the maximum pressure the filter can withstand.
- 3. Firmly connect the syringe to the female luer-lock filter connection. If using a needle, tip or accessory connected to the male luer-lock filter connection, be sure the connection has been made properly.
- 4. Hold the syringe in a vertical position, with the filter up, and proceed to slowly advance the plunger until the liquid exits from the filter outlet. This will allow purging the air content in the syringe filter and promote the proper wetting of the membrane.
- 5. Filter the contents of the syringe and collect it into a flask or suitable container.
- 6. Once the filtration is complete, discard the filter according to the legal requirements for single use products

# Chemical compatibility:

			Filter Media													Housing			
R= Recommended L= Limited Resistance (testing before use is recommended) N= Not Recommended T= Test NR = Not Resistant		Cellulose Acetate	Nitrocellulose	Polyethersulfone	Nylon 66	PTFE (unlaminated)	PTFE (laminated)	PVDF Philic	RC	Glass Fiber (binder)	Glass Fiber (no binder)	Silver	Polycarbonate	Polyester	Modified Acrylic	Polysulfone	Polystyrene	Polypropylene	
Chemical		ca	nc	pes	ny	ptu	ptl	pvdf	rc	gfb	gfn	ag	рс	pet	ac	ps	pst	рр	
SOLVENTS	Chloroform	N	R	N	NR	R	L	R	R	R	R	R	N	R	N	L	N	L	
	Cyclohexane	R	R	Т	R	R	R	Т	R	R	R	R	R	R	Ν	R	Т	R	
	Cyclohexanone	Ν	Ν	Ν	Т	R	R	Ν	R	R	R	R	L	Т	Ν	Ν	Ν	R	
	Diethyl Acetamide	Ν	Ν	Т	R	R	Ν	Т	R	R	R	R	NR	NR	Ν	Ν	N	Т	
	Dimethyl Formamide	Ν	Ν	N	R	R	R	Ν	L	Ν	R	R	NR	NR	Ν	Ν	Ν	R	
	Dimethyl Sulfoxide (DMSO)	Ν	Ν	N	R	R	R	N	R	Ν	R	Т	Ν	R	Ν	Ν	N	Т	
	Dioxane	Ν	N	L	R	R	R	R	R	R	R	R	N	R	N	N	N	R	
	Ethyl Ether	L	L	R	R	R	R	R	R	Т	R	R	R	R	Ν	L	N	Ν	
	Ethylene Dichloride	L	L	Т	R	R	R	Т	Т	R	R	R	N	R	Т	N	Т	Т	
	Formaldehyde	L	Ν	R	R	R	R	R	Т	R	R	R	R	R	Ν	R	N	R	
	Freon TF	R	R	R	R	R	R	R	Т	R	R	R	R	R	L	R	N	Т	
	Gasoline	R	R	Τ	R	R	R	R	R	R	R	R	R	R	N	R	N	N	
	Hexane	R	R	т	R	R	R	R	R	L	R	R	R	R	N	R	N	Τ	
	Isopropyl Acetate	N	N	Τ	R	R	R	N	R	N	R	R	R	R	N	N	N	R	
	Kerosene	R	R	Т	R	R	R	R	R	R	R	R	R	R	N	N	N	Τ	
	Methyl Acetate	N	N	Т	R	R	R	R	R	N	R	R	N	R	N	N	N	R	
	Methyl Ethyl Ketone (MEK)	N	N	N	R	R	R	NR	R	R	R	R	NR	R	N	N	N	т	
	Methyl Isobutyl Ketone	N	N	T	R	R	R	N	R	R	R	R	NR	Т.	N	N	N	Т	
	Methylene Chloride	N	N	N	т	R	R	R	NR	R	R	R	N	NR	N	N	N	N	
	Nitrobenzene	N	N	N	Т.	R	R	R	NR	N	N	Т	N	NR	N	N	N	R	
	Pentane	R	R	R	R	R	L	R	NR	R	R	R	R	R	N	R	N	Т	
	Perchloroethylene	R	R	N	R	R	R	Т	R	N	N	R -	Т	<u>T</u>	N	L	N	L	
	Pyridine	N	N	N	т	R	R	N	R	N	R	R	N	т	N	N	N	L	
	Tetrahydrofuran	N.	N	N	Т	L	L	N	R	T	<u>L</u>	R -	N	<u>T</u>	N	N	N	L	
	Toluene	L	R	N	R	R	L	R	R	<u>N</u>	R	R	L	R	N	N	N	L	
	Trichloroethane	<u>L</u>	N	<u>L</u>	<u>T</u>	R .	R	<u>T</u>	NR -	T	T	. R	N	T	N	N	N	Τ	
	Trichlorethylene	R	R	R	<u>T</u>	<u>L</u>	L	R	R	<u>N</u>	N	R	В.	ND -	<u>N</u>	N	<u>N</u>	N	
	Triethylamine	R	<u>L</u>	Т.	R _	R	R	T	R	R -	R -	R -	L	R	Т	N	T	<u>T</u>	
Xylene		R	R	L	т	R	L	R	R	R	R	R	NR	NR	N	N	N	R	





Quality guarantee: Product totally produced in a clean room under quality criteria according the ISO 9001:2008 norms. Quality control on 100% of the production.



### **WORLDWIDE**

### **DISTRIBUTION CENTERS**



### **EUROPE**

# **Italy Office**

GVS S.p.A. Via Roma 50 40069 Zola Predosa (BO) - Italy Tel. +39 051 6176311 Fax +39 051 6176200 lifesciences.it@gvs.com

United Kingdom GVS Filter Technology UK Ltd. NFC House Vickers Industrial Estate Mellishaw Lane, Morecambe Lancashire LA3 3EN Tel. +44 (0) 1524 847600 lifesciences.uk@gvs.com

Russia GVS Russia LLC Profsoyuznaya Street, 25-A, office 102 117418, Moscow Russian Federation (Russia) Tel. +7 495 0045077 lifesciences.ru@gvs.com

GVS Microfiltrazione srl Sat Ciorani de Sus 1E 107156 Ciorani Prahova România Tel. +40 244 463044 lifesciences.ro@gvs.com

GVS Türkiye Cevizli mah. Zuhal cad. Ritim Istanbul no: 44 A-1 Blok D.371 Maltepe / Istanbul Tel. +90 216 504 47 67 lifesciences.tr@gvs.com

### **ASIA**

China GVS Technology (Suzhou) Co., Ltd. Fengqiao Civil-Run Sci-Tech Park, 602 Changjiang Road,S.N.D. Suzhou, China 215129 Tel. +86 512 6661 9880 Fax: +86 512 6661 9882 lifesciences.cn@gvs.com

GVS Japan K.K. GVS Japan N.N. KKD Building 4F, 7-10-12 Nishishinjuku Shinjuku-ku, Tokyo 160-0023 Japan Tel. +81 3 5937 1447 Fax +81 3 5937 1448 lifesciences.jp@gvs.com

GVS Korea Ltd #315 Bricks Tower 368 Gyungchun-ro(Gaun-dong), 472060 Namyangju-si, Gyunggi-do Tel: +82 31 563 9873 Fax: +82 31 563 9874 lifesciences.kr@gvs.com

India GVS Filter India Pvt Ltd Unit No 35 & 36 on First Floor Ratna Jyot Industrial Premises Irla Lane, Irla Vile Parle, Mumbai 400056, India lifesciences.in@gvs.com

Malaysia GVS Filtration Sdn.Bhd Lot No 10F-2B, 10th Floor, Tower 5 @ PFCC Jalan Puteri 1/2, Bandar Puteri 47100 Puchong, Selangor, Malaysia Tel: +60 3 7800 0062 lifesciences.my@gvs.com

RNAIANG GVS Filtration Co., Ltd. 88 Ratchadaphisek Rd, Office 10E03 - Khlong Toei, Bangkok 10110 lifesciences.th@gvs.com

## **AMERICA**

GVS North America, Inc. 63 Community Drive Sanford, ME 04073 - USA Tel. +1 866 7361250 lifesciences.us@gvs.com

98 Carr 194 - Fajardo, Puerto Rico, 00738-2988, USA Tel. +1.787.355.4100 e-mail: gvspuertorico@gvs.com

GVS de México Universal No. 550, Vynmsa Aeropuerto Apodaca Industrial Park, Ciudad Apodaca, Nuevo León, C.P. 66626 México Tel. +52 81 2282 9003 lifesciences.mx@gvs.com

Brazil
GVS do Brasil Ltda.
Rodovia Conego Cyriaco Scaranello Pires 251
Jardim Chapadão, CEP 13193-580
Monte Mor (SP) - Brasil
Tel. +55 19 38797200
Fax +55 19 38797251 lifesciences.br@gvs.com

GVS Argentina S.A. Francisco Acuña de Figueroa 719 Piso:11 Of: 57 1416 Buenos Aires - Argentina Tel. + 5411 48614750 lifesciences.ar@gvs.com